



# TITAN MICROINVERTER Quick Installation

## Talent Monitoring Configuration

TITAN microinverter has integrated monitoring module inside. The microinverter will directly connect the router (Wi-Fi Version). Users can use the Talent APP or enter the Talent website to monitor the microinverter.

Visit [www.tsun-ess.com](http://www.tsun-ess.com) to find the Talent monitoring platform and download the Talent APP.


### Got an Account

#### Distributor Account


Distributors must contact the superior distributor or TSUN to get a distributor account. The default password is "123456".

Each distributor account is defined as "Manager" Role. Each organization only has one "Manager" who can add other members in this organization.

Login the Talent monitoring platform. Distributor can add a new member by **Organization → Organization Name → Member List → Add Member**. The default password is "123456".

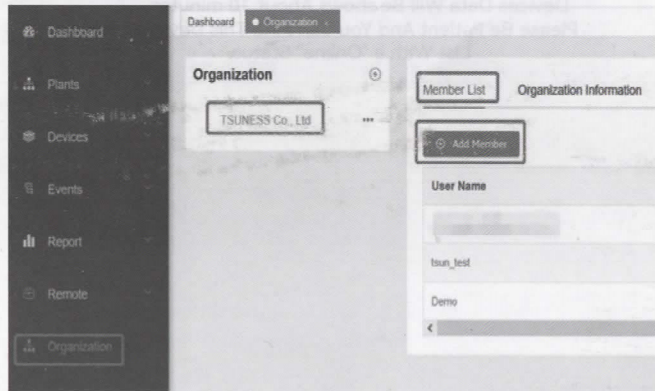


Distributors can create a sub organization account for internal department or external organization (sub distributor or installer). Visit **Organization → "..."** → **Add the Sub Organization**. The default password is "123456".

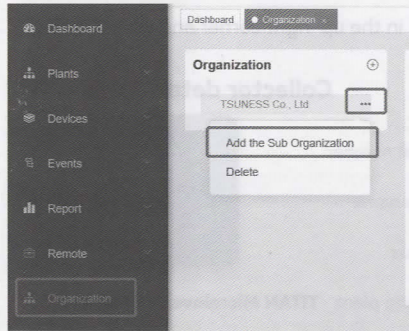

#### Installer Account

Installers must contact the distributor to get an account. The default password is "123456".


Each organization has an Organization Code. Find it in the Talent APP or Talent monitoring platform. Visit **Organization → Organization Name → Organization Information**.

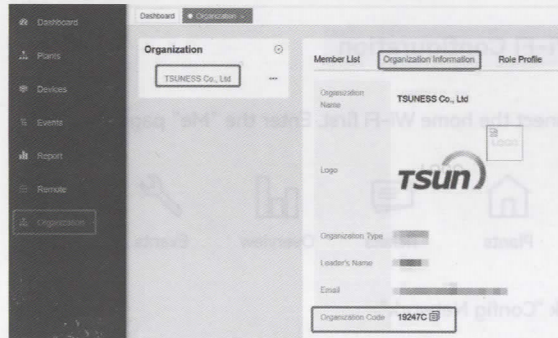

The Organization Code will be used while creating a solar plant for the customer.

#### End User Account

End user should download the Talent APP and register a new account.

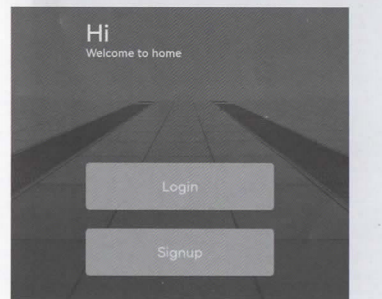


### Create a Solar Plant


Use the end user account to login the Talent App. Enter the "Plants" page.



Find the "..." in the up-right corner and click "Create Plant".

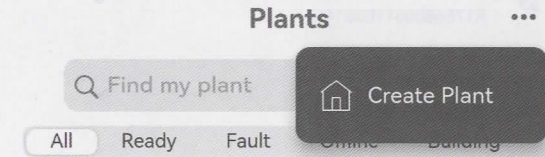

Finish the information of the solar plant.

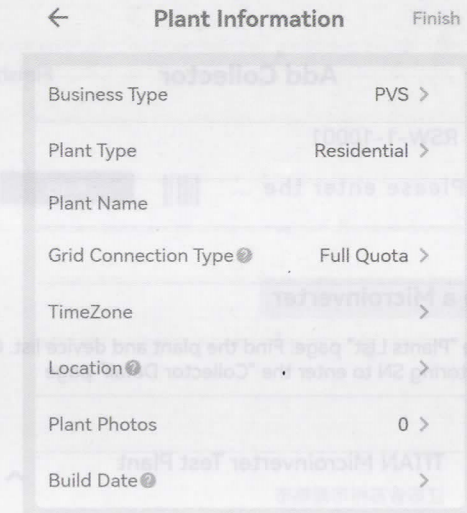

Pay attention that:

- ✓ The "Business Type" should be "PVS".
- ✓ The "Organization Code" should be provided by installer. This code will have a huge influence on the after-sales service.
- ✓ The solar plant can only be deleted on the website platform.




### Add a Microinverter

Enter the "Plant List" page. Find the "Add Collector".




Set the monitoring type as "RSW-1-10001". Then scan or enter the monitoring SN. The monitoring SN start with "R". Click "Finish".

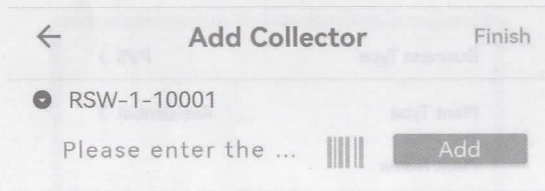


### Delete a Microinverter

Enter the "Plants List" page. Find the plant and device list. Click the monitoring SN to enter the "Collector Detail" page

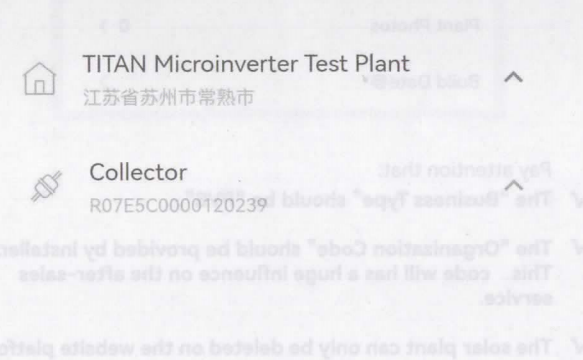


Find the "... " in the up-right corner and click "Unbind".

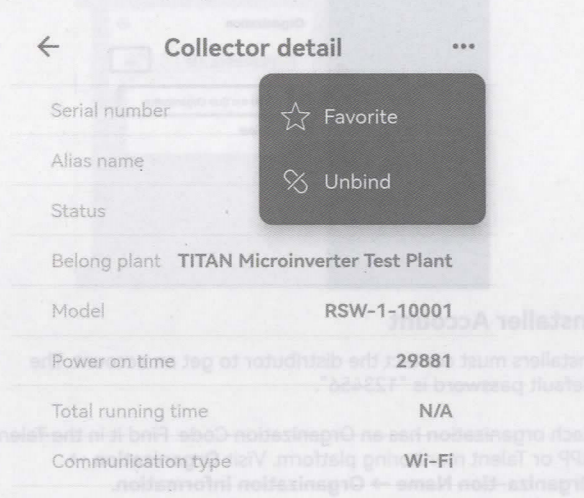


### Wi-Fi Configuration


Connect the home Wi-Fi first. Enter the "Me" page.

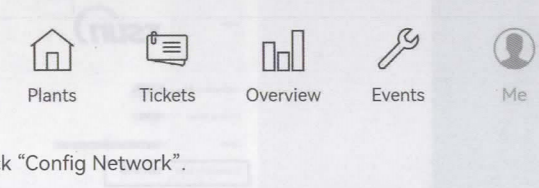


Click "Config Network".




Scan or enter the monitoring SN.

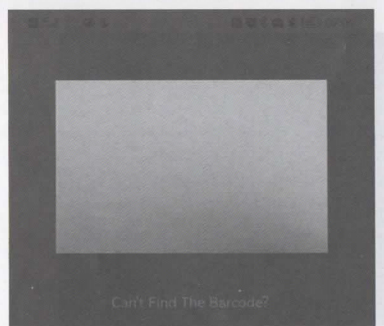

Choose the WIFI and enter the password. Click "Start Config".

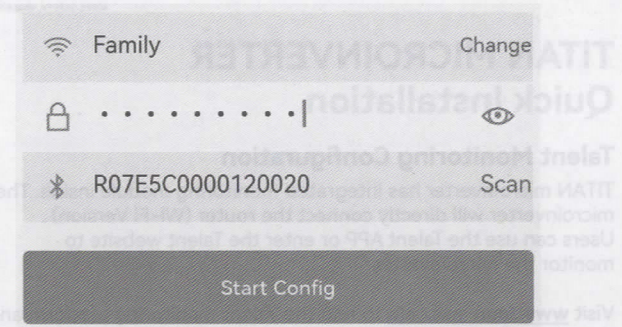

The networking operation will be done automatically.

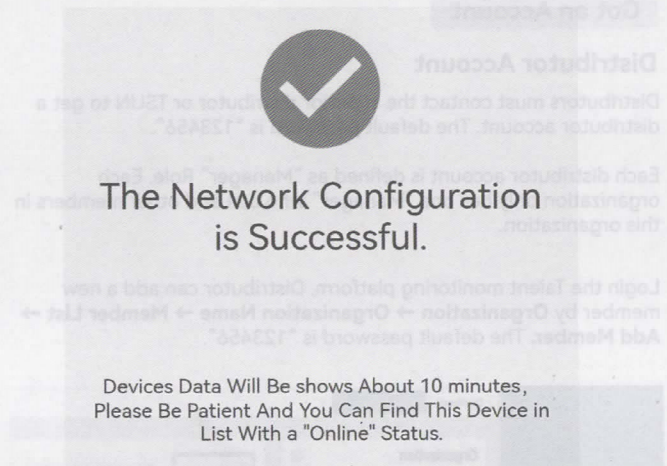

TSUNESS Co., Ltd

E-MAIL : sales@tsun-ess.com  
WEB : www.tsun-ess.com  
TEL : +86-512-66186028

